
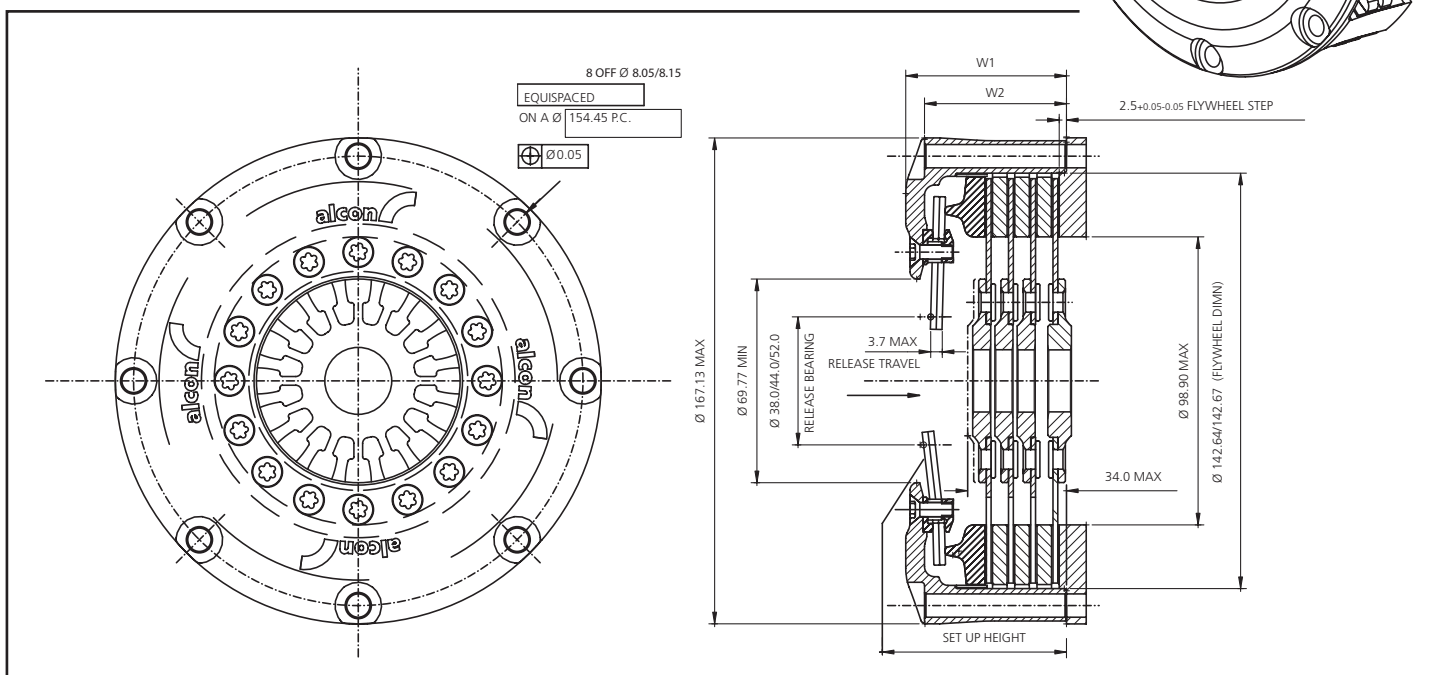


multi-plate race clutch assembly 140mm / 5.50"

KEY FEATURES AND BENEFITS

- **Compact design**
Low weight and moment of inertia
- **High stiffness cover design**
Improved startline control
- **Optimised fulcrum position**
Reduced pressure plate distortion
- **Interchangeability with other manufacturers' clutches**
- **Open lug type design**
Improved cooling & dust removal
- **Interchangeability with other manufacturers' plates**

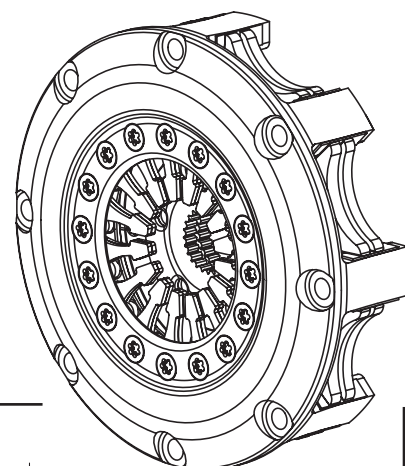

FLOATER PLATE
PRODUCT REF
KPS140L08FX02

PRESSURE PLATE	RATIO	DIM H	D1
PRODUCT REF			
KPS140L08H537	High	13.7	117
KPS140L08U537	Ultra high	13.7	114

PRESSURE PLATE DIMENSIONS
Please refer to page 16 for a drawing showing the position of the DIM H and D1 references shown in the table to the left

PRODUCT REF	Ø	PLATES	MAX	SPRING	W1	W2	SET UP HEIGHT	
			TORQUE	RATE			NEW MIN	WORN MAX
KKS1402HORSR01	140	2	480	Orange	39.8	32.4	30.4	34
KKS1402HDGSR01	140	2	582	Double grey	39.8	32.4	30.4	34
KKS1403HORSR01	140	3	721	Orange	46.5	40.1	37.5	41.3
KKS1403HDGSR01	140	3	872	Double grey	46.5	40.1	37.5	41.3
KKS1404HDGSR01	140	4	1117	Double grey	54.4	46.6	44.6	48.6

All dimensions shown are in millimetres unless otherwise stated